C-Series Padlock

Removable, Pop Open (Key Retaining)



Application

High security padlock, for general use with Mul-T-Lock hasps or shackle protectors.

Operation

Unlocking with 55°-65°key rotation.

Options

Removable with non retaining key. Pop open with retaining key (key needed for closing). Variety of shackle clearances. Available in black or nickel finish. C-13 available in one piece Stainless steel shell and shackle protector.

Materials

Shell: Hardened Steel.

Core: Black Plated Solid Brass. Shackle: Hardened Boron Alloy Steel.

Additional Features

Protective shutter to prevent dust contamination. Drainage holes to prevent freezing.

Cylinder Mechanism

Mul-T-Lock unique high precision 10 telescopic pin tumbler system. Pick and drill resistant for high security needs.

Keys

Reversible Nickel Silver key with plastic key head and coloured insert for identification. Also available in all-Nickel Silver.

Key Security


Orders for keys marked "do not duplicate" should only be made upon presentation of a key card.

Cylinder Options

Classic, Interactive® (patented).
'3 IN 1' (changeable combination).
Keyed different, Keyed alike,
Master keyed.

Standards

ISI, applicable to "CEN".

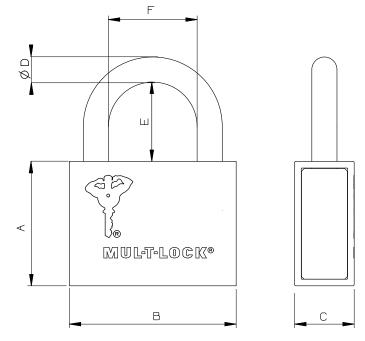

Model		Body			Shackle						Standard Grades	Suitable Hasp#
		A B C			D	E				F		
						E	E1	E2	E3		"CEN"	
C-6	mm	47	50	22	6		22	50	102	24		
	Inch	1.850	1.968	0.866	0.236		0.866	1.968	4.015	0.944		
C-8	mm	47	50	22	7.9		22	50	102	22	2	
	Inch	1.850	1.968	0.866	0.311		0.866	1.968	4.015	0.866		
C-10	mm	47	63	22	9.5		30	63	102	33	- 3	10
	Inch	1.850	2.480	0.866	0.374		1.181	2.480	4.015	1.299		
C-13	mm	51	73	25	12.7	25	37	58	102	33	4	13
	Inch	2.007	2.874	0.984	0.5	0.984	1.456	2.283	4.015	1.299		
C-16	mm	53	92	32	15.8		50	63	102	38	- 5	16
	Inch	2.086	3.622	1.259	0.622		1.968	2.480	4.015	1.496		

^{*}Applicable to "CEN" grade standard.

Note: The addition of a hasp will considerably increase the level of security.

